

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

(21) (A1)	2,043,170
(22)	1991/05/24
(43)	1992/11/25

5,015,4/27

(51) INTL.CL.<sup>5</sup> D04H-011/00; D05C-015/00; B24C-001/00

(19) (CA) **APPLICATION FOR CANADIAN PATENT** (12)

(54) Synthetic Turf, Method of Making Thereof, Border Strip  
for Small Size Golf and Understructure for Artificial  
Large Size Golf

(72) Lemieux, Alain - Canada ;

(73) Top Golf Inc. - Canada ;

(57) 22 Claims

Notice: The specification contained herein as filed

**Canada**

ABSTRACT OF THE DISCLOSURE

The synthetic turf has a base made of fabric material from which upwardly projects a mass of entangled, crimped grass-like frayed blades made of polypropylene, nylon or polyester. The blades have a length between  $3/8$ " and 2", a weight from 28 to 60 ounces per square foot and a denier value of about 5400. The method of treating this synthetic turf consists in sandblasting the blades from above the turf at a distance of about 3 to 4 feet with a jet of sand having a pressure of about 80 to 120 pounds per square inch and directed at an angle of about  $70^{\circ}$  to  $80^{\circ}$  from the horizontal and in a circular motion. The border strip for an artificial golf practice course comprises a body made of polystyrene, a sheet of polypropylene applied over the body and a synthetic turf covering applied over the sheet of polypropylene. The body is shaped so that the synthetic turf covering form a ball rolling surface inclined or square with respect to a central playing surface. The understructure for an artificial golf course comprises a plurality of platform structures arranged side-by-side in the manner of a checkerboard, these structures establishing nodal points at the junctions of every group of four adjacent platform structures and a lifting jack at each of the nodal points. Bolts connect the corners of adjacent platform structures at each nodal point to a relevant one of the jacks.

BACKGROUND OF THE INVENTION

## Field of the Invention

5 The present invention concerns the game of golf, in general,  
and more particularly a synthetic turf having a simulated  
grass surface; a method of treating it; border strips for  
artificial minigolf, and an understructure for an artificial  
10 large size golf course.

## Description of the Prior Art

15 Synthetic turfs are well known in the prior art, for example  
in U.S. patents Nos. <sup>428/17,922, 97</sup> 4,356,220; <sup>428/17,379, 1331</sup> 4,389,435 and 4,497,853.  
They generally include a fabric base tufted with  
conventional artificial grass blades held to the fabric base  
by an adhesive material such as polyurethane which also  
provides a certain cushioning effect.

20 Also known in the prior art, more particularly in U.S.  
patent 3,735,988, is a practice putting surface making use  
of vertical border strips intended to prevent the golf ball  
from rolling off the putting surface.

25 Further patents found in a prior art search are as follows:  
3,573,147; 3,577,681; 3,597,297; 3,740,303; 3,801,421;  
3,995,079; 4,061,804; 4,902,540; and 4,902,541.

30 One drawback with the above-mentioned patents is that these  
artificial turfs do not provide a very good imitation of  
natural turf.

Also, none of the above-mentioned patents provides an  
adequate strip border for minigolf.

According to one aspect of the present invention, it is an object to propose an artificial turf providing a better imitation of a natural turf than the one known in the art.

5 According to another aspect of the present invention, it is an object to provide a strip border for minigolf that present interesting characteristics for golf players.

10 According to another aspect of the present invention, it is an object to provide an understructure for a large size golf surface, allowing modifications of the shape of the golf surface.

#### SUMMARY OF THE INVENTION

15 According to the present invention, there is provided a synthetic turf comprising:

- a base made of fabric material;
- a mass of entangled, crimped grass-like frayed blades made of a material selected from the group consisting of polypropylene, nylon and polyester; said blades being grouped into tufts projecting upwardly from said base; and
- a layer of adhesive material fixing lower ends of said tufts into said base, said blades have a length in the range of 3/8" to 2" and a weight in the range of 28 to 60 ounces per square foot.

20 Thus, a dense and uniform playing surface is obtained to allow a golf ball to hold on to its trajectory after being hit, much as on a natural golf course. The synthetic grass material, previously tinted green, also loses its luster during sandblasting and adapts a pale green close to that of natural grass.

30

According to the present invention, there is also provided a method of treating a grass-like blade surface of a synthetic turf, said method comprising steps of:

5       - selecting a synthetic turf including blades made of a material chosen in the group consisting of polypropylene, nylon and polyester; said blades being grouped into tufts projecting upwardly from a fabric base; and

10       - sandblasting said blades from above said turf at a distance of about 3 to 4 feet with a jet of sand having a pressure of about 80 to 120 pounds per square inch directed at an angle of about  $70^{\circ}$  to  $80^{\circ}$  from the horizontal and in a circular motion.

15       According to the present invention, there is also provided a border strip for an artificial golf practice course, this border strip can be mounted to extend along edges of a playing surface, said border strip comprising a body made of polystyrene of type 2, a sheet of polypropylene laminated over said body, and a synthetic turf covering fixed over  
20       said sheet of polypropylene, said body being shaped so that said synthetic turf covering forms a ball rolling surface inclined or square with respect to said playing surface.

25       Known in the art are vertical border strips intended to prevent a golf ball from rolling off the putting surface.

30       These strips are made of hard material and have the effect, however, of producing big rebound of the ball. To eliminate this drawback, a border strip as described above is provided.

According to the present invention, there is also provided an understructure for an artificial game surface,

comprising:

- 5       - a plurality of platform structures arranged side-by-side, said platform structures establishing nodal points at junctions of every group of four adjacent platform structures;
- a plurality of lifting jacks, each of said jacks being disposed at one of said nodal points; and
- 10       - a plurality of connecting means, each of said means connecting corners of the adjacent platform structures at one of said nodal points to the relevant one of said jacks, whereby said golf surface has a shape that can be modified by means of said lifting jack.

15       A description now follows of preferred embodiments of the invention having reference to the appended drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

20       Figure 1 is a schematic elevation view of a portion of a synthetic turf surface being subjected to a sandblasting treatment;

      Figure 2 is a top plan view of a portion of a golf practice course;

25       Figure 3 is a cross-section along line III-III of Figure 2, showing a border strip according to the present invention;

      Figure 4 is a top plan view of a portion of an understructure for an artificial golf course;

30       Figure 5 is a top plan view, on an enlarged scale, taken at a nodal point in the plan view of Figure 4;

Figure 6 is a cross-sectional view taken along line VI-VI in Figure 4;

5 Figure 7 is a top plan view of a portion of the wooden understructure supporting the lifting jacks;

10 Figure 8 is a side elevation view, partly broken away to show the inner construction, of the lifting assembly and platform structure, the view being taken at a nodal point of the golf course understructure;

Figure 9 is a top plan view of a lifting jack plate; and

15 Figures 10 and 11 are plan views of anchor plates located at the corners of a surface panel of one platform structure of the understructure.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

20 Referring to Figure 1, there is shown a synthetic turf 1. It consists of a base 3 made of a fabric material and from which vertically emerge grass-like blades 5 grouped into tufts fixed by their lower ends solidly to the base by a layer of adhesive material. The latter may be polyurethane or its equivalent. The blades 5 are made of a material selected from the group consisting of polypropylene, nylon and polyester. Also, their length lies in the range from 3/8" and 2", their weight in the range from 28 to 60 ounces per square foot while their denier value is about 5400. The synthetic turf according to the present invention is shown in 6, the blades of the grass-like turf are frayed by means of a sandblast process.

30 Where the turf is to be used on an artificial golf green, their length is from 3/8" to 3/4" and their weight from 60 to 40 ounces per square foot, respectively. If they are to be used on a teeing surface, they have a length of about 2"



while their weight is of about 28 ounces per square foot.

Also, a second synthetic turf can be juxtaposed to the turf mentioned above, used for artificial golf green. This second turf comprises a base made of fabric material, a mass of entangled crimped grass-like blades made of a material selected from the group consisting of polypropylene, nylon and polyester. The blades are grouped into tufts projecting upwardly from the base. A layer of adhesive material fixes lower ends of the tufts into the base. The blades have a length in the range of  $3/4$ " and 1", a weight of about 38 ounces per square foot and a denier value of about 5400.

According to the invention, the surfaces of the blades are treated by sandblasting from a sand source in the form of a hose 7 provided at its end with a nozzle 9. The source must be capable of giving a sand pressure of 80 to 120 pounds per square inch. The sand itself should have a screen mesh particle size in the range from 16 to 40. It preferably is a brown or alvine sand having a screen mesh particle size of 24.

In the practice of the method, a person places the nozzle 9 by hand at a distance of about 3 to 4 feet above the turf 1 and the jet 11 is directed against the blades 5 at an angle of about  $70^{\circ}$  to  $80^{\circ}$  from the horizontal. The jet is applied by the person with a circular motion, in a direction contrary to that of the blades. Of course, the nozzle can be moved by a machine.

As said above, the method of the invention makes it possible to obtain a turf surface wherein the blades become entangled, crimped and frayed so as to hide the base 3 of fabric material properly and completely, resulting in a dense and uniform playing surface capable of holding a

running ball on its trajectory, after being hit, very much as on a natural golf course. The blades also lose their luster and become pale green close to that of natural grass.

5        Figures 2 and 3 show another aspect of the invention in the  
form of an artificial golf practice course 13 having a  
horizontal planar central playing surface 15 along either  
edge of which extend the border strips 17 defining, on their  
faces looking toward the central playing surface, ball  
10        rolling surfaces 19 that are inclined at an angle preferably  
ranging from  $30^{\circ}$  to  $40^{\circ}$ , or square. The border strip 17  
comprises a body 14 made of polystyrene of type 2, a sheet  
16 of polypropylene laminated over said body 14 and a  
synthetic turf, that can be of the type described above, is  
15        layed over and made fast with both the playing surface 15  
and the rolling surfaces 19. The sheet of polypropylene has  
a thickness of  $1/2$  inch to 1 inch and a density of 2 to 6  
pounds per square foot. The grass-like blades have a height  
preferably of  $3/4$ " to 1" and a weight of 28 ounces per  
20        square foot. As to the border strips, their height can be  
about 8". The inclination of the rolling surface makes it  
possible to hold the golf ball more accurately on the golf  
after having been hit by the golf player.

25        Figure 4, illustrating only a portion 21 of an  
understructure for an artificial large size golf course made  
according to the invention, shows a group of 9 rectangular  
platform structures 23 of, for example, 8' x 8'. Please note  
that the platforms are not necessarily rectangular. They can  
30        be triangular, for example. These structures are arranged  
side-by-side in the form of a checker-board establishing  
nodal points 25 at the junctions of every group of four  
adjoining panel structures. A lifting jack 27, shown in  
Figures 6 and 8, is provided at each nodal point. The

corners of adjacent platform structures 23 being connected to the relevant lifting jack.

5 Each platform structure 23 comprises a rectangular sub-frame made up of longitudinal channel-shaped side members 29 joining, at their ends, with the ends of transverse channel-shaped side members 31 and the manner shown in Figure 8. The sub-frame should also include central transverse strengthening channel-shaped beams 34 interconnecting the side members 29, and 31.

10 As illustrated in Figure 8, the web 33 of one side member 31 is bent inward, at its end, for use as a connecting flange 35 fixed, by self-tapping screws for instance (not shown) to the web 37 of the crossing side member 29. The same applies at each corner connection of two meeting members 29 and 31. The ends of the upper flanges 39 of the side members 31 are cut off at 41 to allow for the insertion of the members 31 into the members 29 and thus allow the flanges 39 to be made level with the upper flanges 43 of the side members 29. Secured to the side members 29 and 31 at their junctions, as by self-tapping screws (not shown), are L-shaped bottom corner anchor plates 45 shown in Figure 11 and top corner anchor plates 47 shown in Figure 10. It will be noted from 20 Figures 10 and 11, that the plates 45 and 47 are cut out of rectangular plates of equal size, therefore having side edges of equal length overlapping one another in the situation of Figure 8. Also, the combined plates 45 and 47 largely overlap the frame members 29 and 31.

25 30 Finally, each platform structure 23 further comprises a plywood floor panel 49, which can be made of any other flexible material such as fiber glass, fixed to the anchor plates 45 and 47, as well as to the upper flanges 39 and 43,

of the frame members 31 and 29, by any known means such as by self-tapping screws. In this manner, it will be understood that the sub-frames 29 and 31, the anchor plates 45 and 47, and the plywood floor panel 49 form a solid body. It should be noted that the side edges of the floor panel fall in line with the corresponding side edges of the plates 45 and 47, as best seen in Figure 8.

In this Figure 8, it is seen that each lifting jack 27 is made up of a lifting rod in the form of a hollow cylindrical pipe 51 having, fixed transversely at its upper end, a rectangular jack plate 53, also shown in Figures 5 and 9. Every platform structure 23, around a nodal point 25, is secured to the corresponding jack plate 53, at one corner by a single bolt and nut combination 55 of which the bolt extends successively through an appropriate hole 57 of the floor panels 49, hole 59 of the anchor plate 47, hole 61 of the second anchor plate 45, and finally hole 63 in the jack plate 53, as shown in Figures 9, 10 and 11.

Referring now to Figure 8, it is seen that the floor panels 49 and the anchor plates 45 and 47, overhang the side members 29 and 31 sufficiently to allow them to avoid the jack plate 53.

As shown, the anchor plate 45 is formed with a through torsion slot 65 between each two successive bolt holes 63, in alignment two-by-two and opening on an edge of the plate.

Each jack 27 further comprises a power screw 67 of which the upper end is slid into the relevant jack pipe 51 while its lower end is secured to a wooden supporting understructure 66 shown in Figure 7. The latter is formed of a series of parallel longitudinal T-shaped beams 69 interconnected by

cross-beams 71. Each beam 69 has a top rectangular element 73 lying flat on an edgewise rectangular vertical element 75 to which it is nailed. The jack seating plate 77 is fixed, as by screws, to the top element 73. Finally, adjustment of the height of the jack pipe 51 is obtained by power nut 79. A lock nut 81 serves to hold the jack 27 at a selected height. As to the wooden understructure 67, it is made to rest on level ground 83 which is preferably obtained with compacted sand.

As shown in Figure 8, the top face of each floor panel 49 is covered with a turf carpet 85, which may be of the type described above, glued to a cushioning underlayer 87 of polypropylene, itself secured to the floor panel 49. A narrow polypropylene strip 89 is made to fill the space between two adjacent underlayers 87.

Once the wooden understructure 67 has been set firm and level on the ground 83, the jacks 27 are fixed to it and operated to lift the platform structures 23 at different preselected heights for them to define an undulated golf course forming mounds and depressions. The use of a single bolt connection 55 joining one corner of a platform structure 23 to a corner of a jack plate 53, along with the provision of the slots 65 through the same plate are intended to relieve the pressure created by the lifting jacks 27 for providing the different nodal heights.

Although the present invention has been explained hereinabove by way of a preferred embodiment thereof, it should be pointed out that any modifications to this preferred embodiment, within the scope of the appended claims is not deemed to change or alter the nature and scope of the present invention.

## WHAT IS CLAIMED IS:

1. A synthetic turf comprising:
  - a base made of fabric material;
  - a mass of entangled crimped grass-like frayed blades made of a material selected from the group consisting of polypropylene, nylon and polyester, said blades being grouped into tufts projecting upwardly from said base; and
  - a layer of adhesive material fixing lower ends of said tufts into said base, said blades have a length in the range of  $3/8"$  to  $2"$  and a weight in the range of 28 to 60 ounces per square foot.
2. A synthetic turf as claimed in claim 1, for use on artificial golf greens, wherein said blades have a length of  $3/8"$  to  $3/4"$ , a weight from 60 to 40 ounces per square foot, respectively and a denier value of about 5400.
3. A synthetic turf as claimed in claim 1, for use on a teeing surface, wherein said blades have a length of about  $2"$ , a weight of about 28 ounces per square foot and a denier value of about 5400.
4. A synthetic turf as claimed in claim 1 or 2, juxtaposed with a second synthetic turf comprising a base made of fabric material, a mass of entangled, crimped grass-like blades made of a material selected from the group consisting of polypropylene, nylon and polyester, the blades of said second turf being grouped into tufts projecting upwardly from the base of said second synthetic turf, and a layer of adhesive material fixing lower ends of the tufts of said second turf into their corresponding base, the blades of said second turf having a length in the range of  $3/4"$  and  $1"$ , a weight of about 38 ounces per square foot and a denier

value of about 5400.

5. A method of treating a grass-like blade surface of a synthetic turf, said method comprising steps of:
- selecting a synthetic turf including blades made of a material chosen in the group consisting of polypropylene, nylon and polyester; said blades being grouped into tufts projecting upwardly from a fabric base;
  - sandblasting said blades from above said turf at a distance of about 3 to 4 feet with a jet of sand having a pressure of about 80 to 120 pounds per square inch directed at an angle of about  $70^{\circ}$  to  $80^{\circ}$  from the horizontal and in a circular motion.
6. A method as claimed in claim 5, wherein said blades have a height of about  $3/8"$  to  $3/4"$  to produce a turf for a golf green.
7. A method as claimed in claim 6, wherein said step of sandblasting said blades is performed in a direction contrary to that of the blades.
8. A method as claimed in claim 7, wherein before said step of sandblasting, said method comprises a step of selecting a sand having a screen mesh particle size in the range from 16 to 40.
9. A border strip for an artificial golf practice course, this border strip can be mounted to extend along edges of a playing surface, said border strip comprising a body made of polystyrene, a sheet of polypropylene laminated over said body, and a synthetic turf covering fixed over said sheet of polypropylene, said body being shaped so that said synthetic turf covering forms a ball rolling surface inclined or

square with respect to said playing surface.

10. A border strip as claimed in claim 9, wherein said ball rolling surface is inclined at an angle in the range of  $30^{\circ}$  to  $40^{\circ}$  to the horizontal.

11. A border strip as claimed in claim 10, wherein said sheet of polypropylene has a thickness of substantially  $1/2$  inch to 1 inch and a density of substantially 2 to 6 pounds per square foot.

12. A border strip as claimed in claim 10, wherein said covering includes grass-like blades having a height between  $3/4$ " to 1" and a weight of about 28 ounces per square foot.

13. A border strip as claimed in claim 10, having a height of about 8".

14. An understructure for an artificial game surface, comprising:

- a plurality of platform structures arranged side-by-side, said platform structures establishing nodal points at junctions of every group of adjacent platform structures;
- a plurality of lifting jacks, each of said jacks being disposed at one of said nodal points; and
- a plurality of connecting means, each of said means connecting corners of the adjacent platform structures at one of said nodal points to the relevant one of said jacks, whereby said golf surface has a shape that can be modified by means of said lifting jack.

15. An understructure as claimed in claim 14, wherein said platforms are rectangular, so that there are four corners



connected by said connecting means, and wherein each of said jacks includes a lifting rod, and each of said connecting means comprises:

- a substantially square jack plate fixed to a free end of said jack rod, transversely thereof;
- anchor plates disposed at the corners of said adjacent platform structures; and
- bolt means securing said anchor plates to said jack plate.

16. An understructure as claimed in claim 15, wherein said bolt means include a single bolt at each corner of said jack plate.

17. An understructure as claimed in claim 16, wherein said jack plate is provided along each of its four edges with a transversal torsion slot allowing a relative movement of each corner of the plate with respect to one another.

18. An understructure as claimed in claim 17, wherein said slots extend perpendicularly of said edges.

19. An understructure as claimed in claim 18, wherein each of said platform structures further comprises:

- a rectangular frame formed of elongated metal side members, said frame being located beneath said anchor plates;
- a rectangular floor wooden panel disposed above said anchor plates;
- fixing means for securing said panel, said anchor plates and said side members together to form each of said platform structures, said panel and said anchor plates overhanging the corresponding side members to allow them to

avoid the corresponding jack plate.

20. An understructure as claimed in claim 17, wherein each of said jack rods is a hollow cylindrical pipe and each of said jacks further comprises:

- a power screw slid inside said pipes;
- a power nut threaded on said screw for moving said pipe vertically; and
- a lock nut threaded on said screw beneath said power nut for holding said power nut and said adjacent platform structures at a selected vertical position.

21. An understructure as claimed in claim 20, wherein said slots extend perpendicularly of said edges.

22. An understructure as claimed in claim 21, wherein each of said platform structures further comprises:

- a rectangular frame formed of elongated metal side members, said frame being located beneath said anchor plates;
- a rectangular floor panel disposed above said anchor plates;
- fixing means for securing said panel, said anchor plates and said side members together to form each of said platform structures, said panel and said anchor plates overhanging said side members to allow them to avoid the corresponding jack plate.

R O B I C .

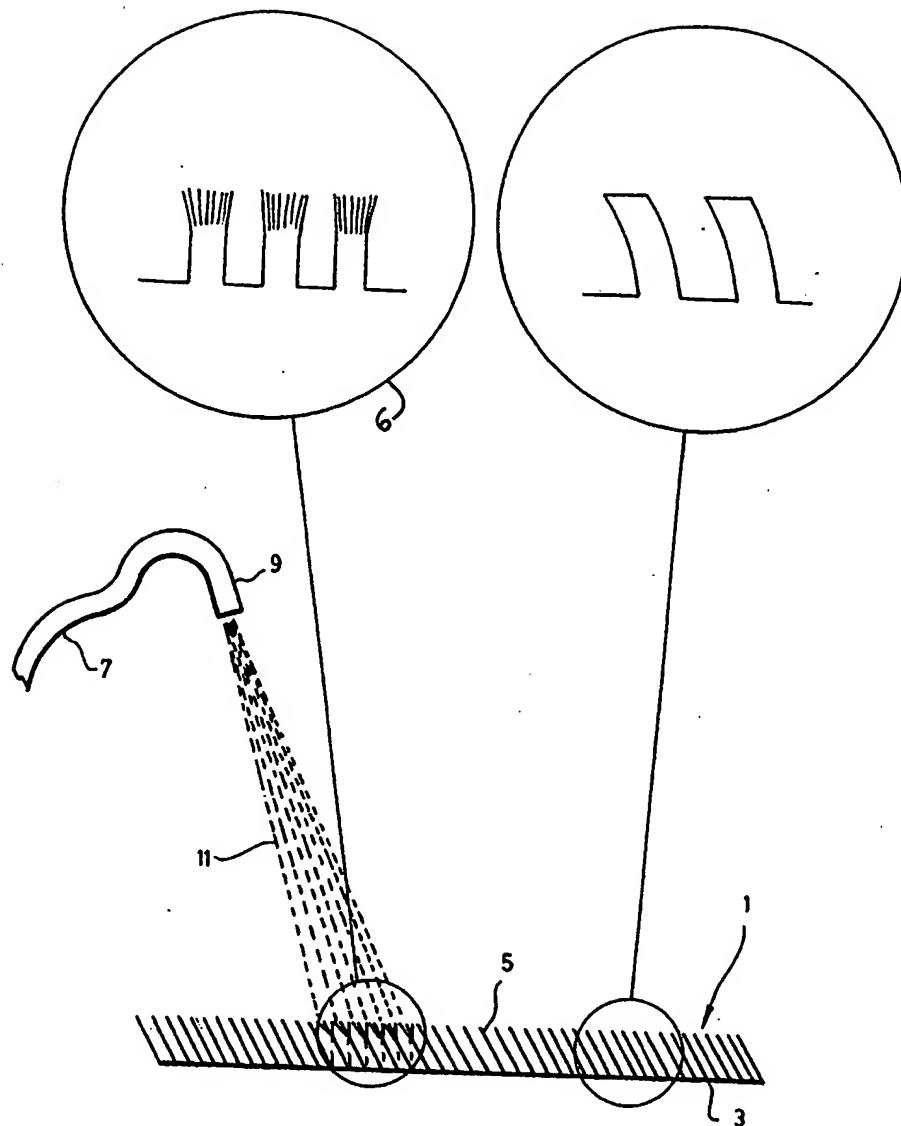


FIG. 1

*Robinson*  
Patent Agents

2043170

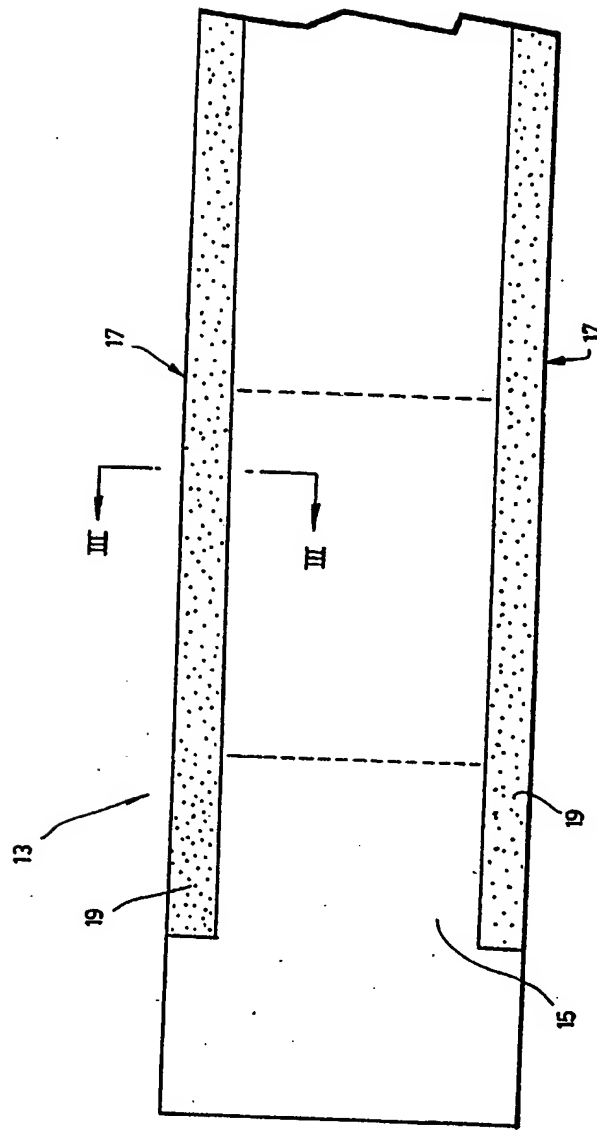


FIG. 2

*Robie*  
Patent Agents

2043170

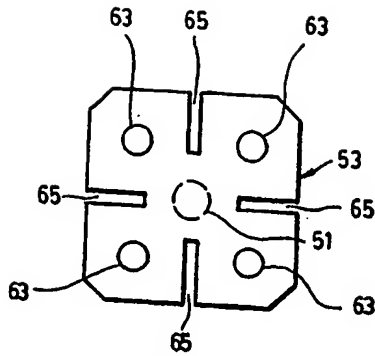


FIG. 9

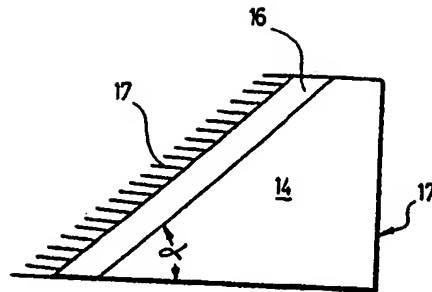


FIG. 3


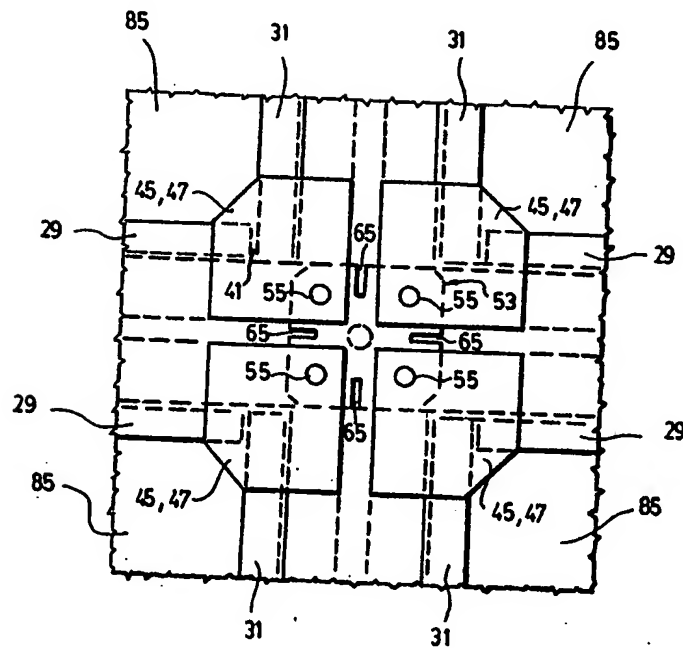


FIG. 5

*Robie*  
Patent Agents

2043170

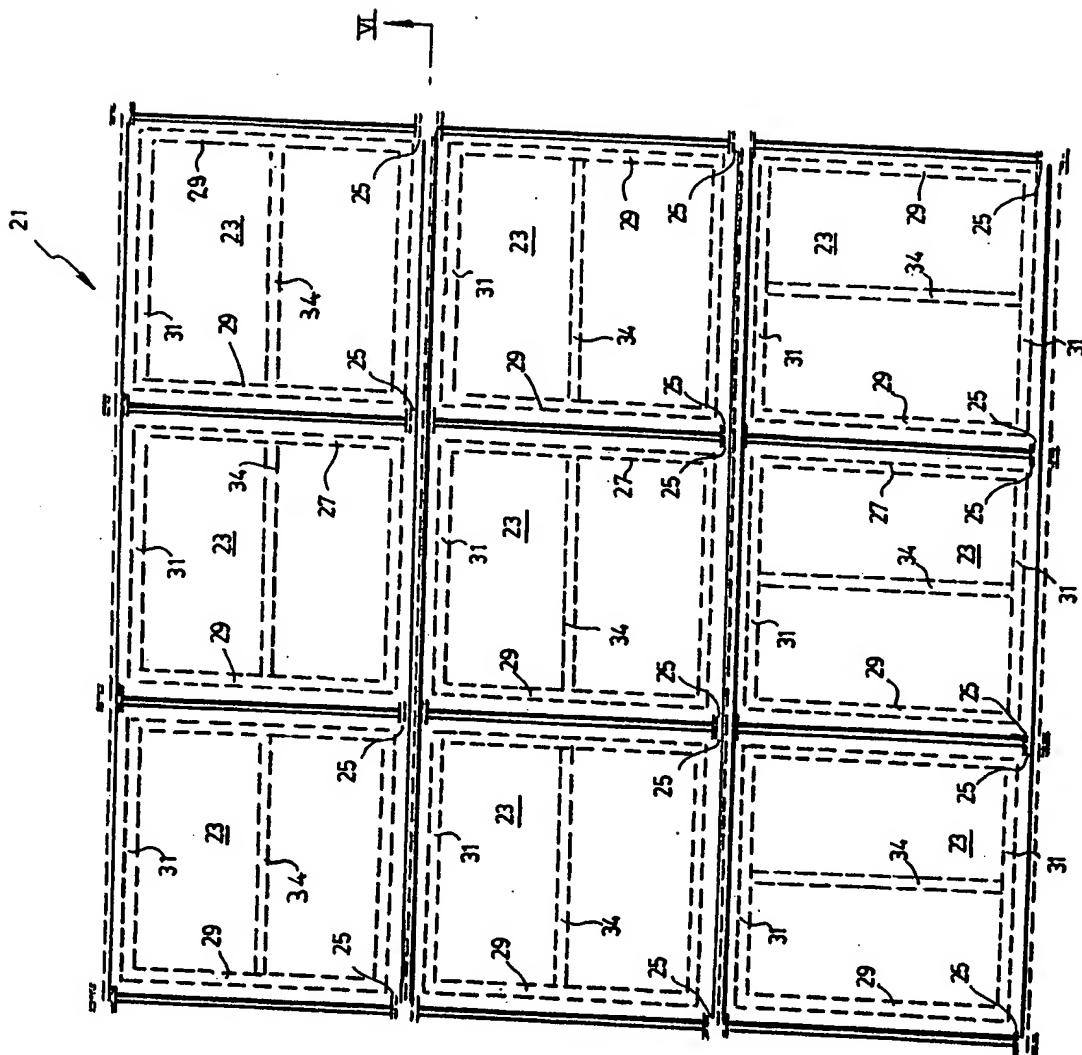

*Robert*  
Patent Agents

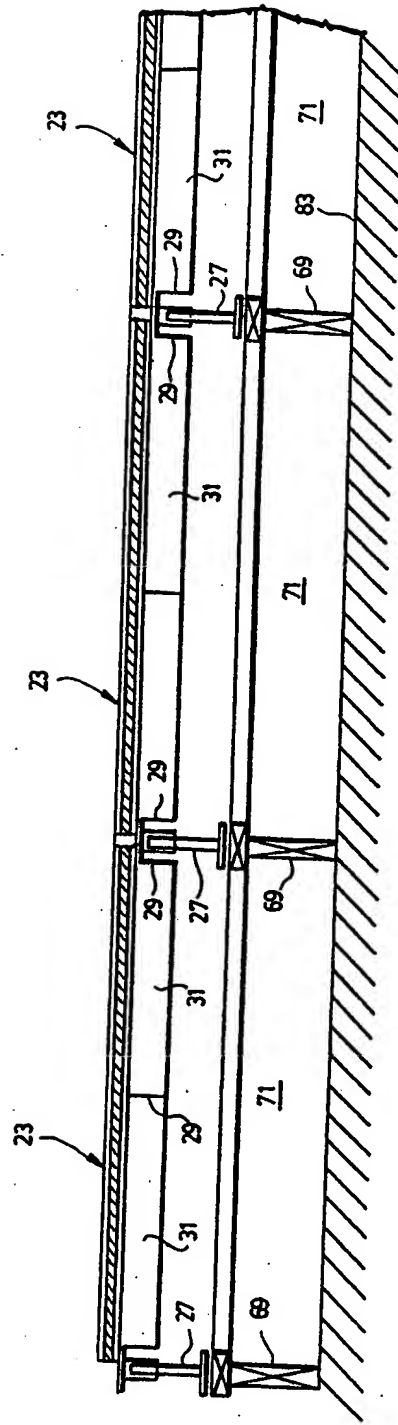


FIG. 6

*Robie*  
Patent Agents

2043170


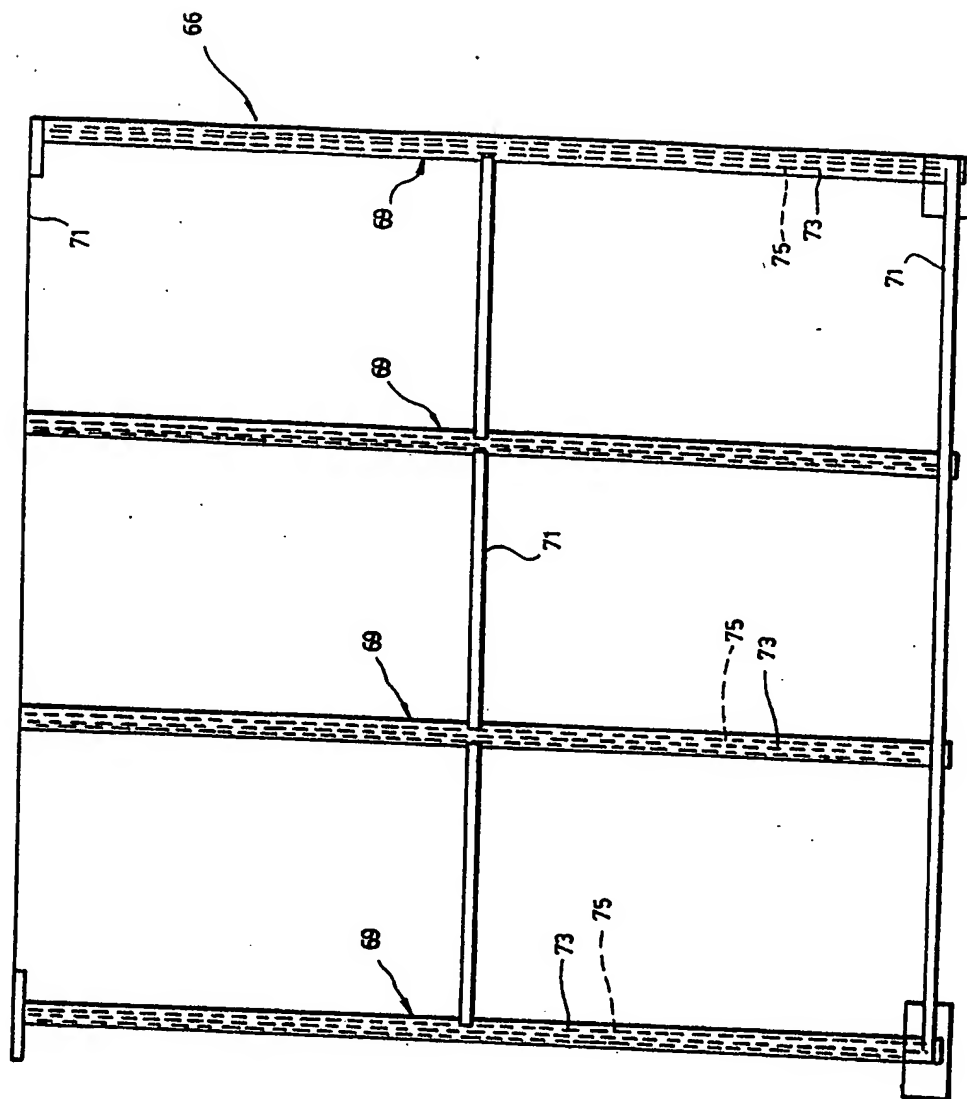


FIG. 7



*Robie*  
Patent Agents



2043170

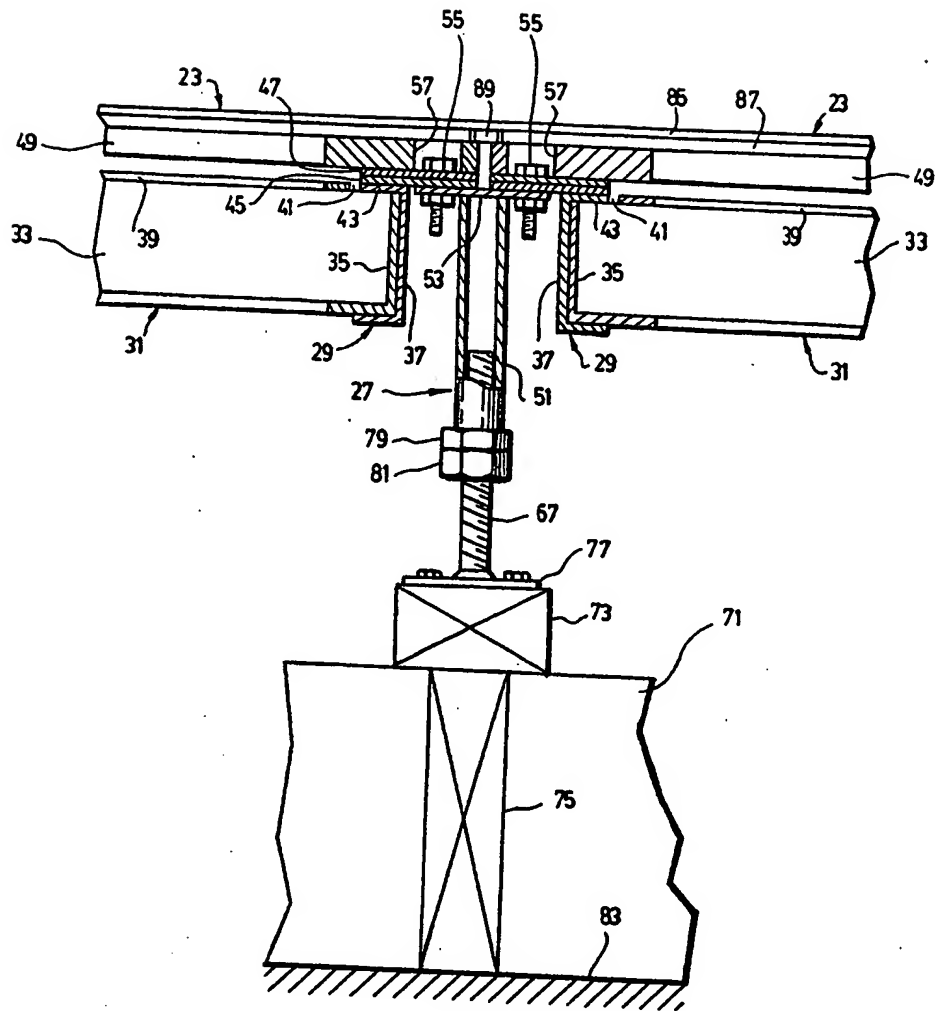

*Robrey*  
Patent Agents

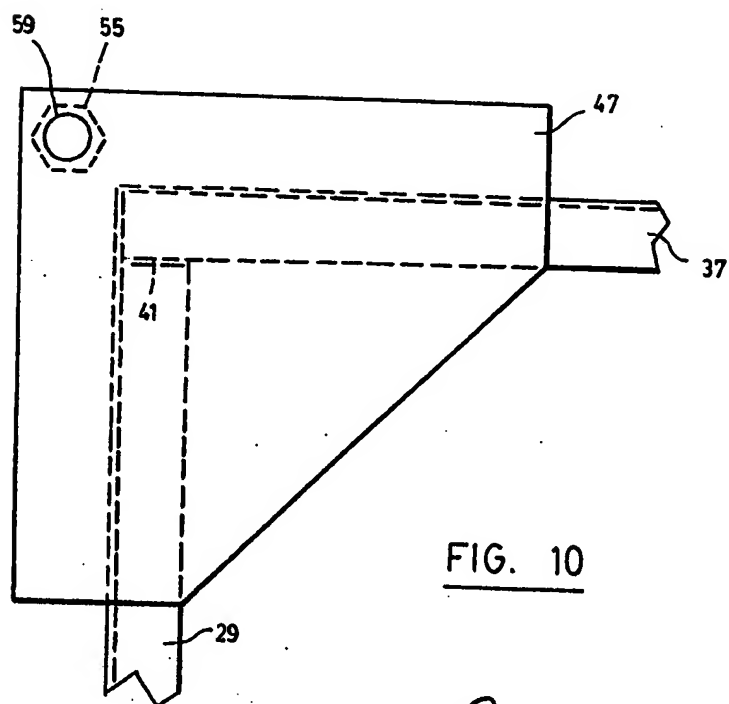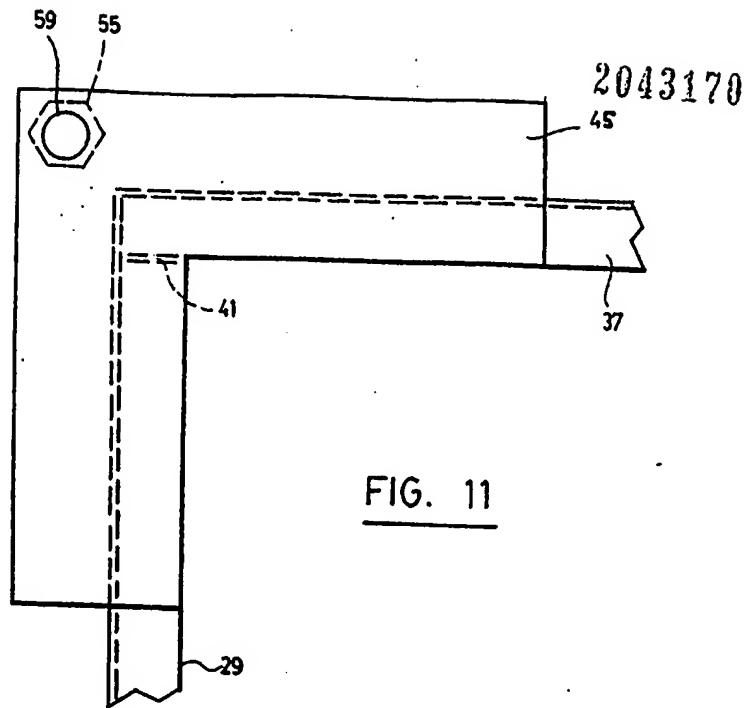

*Prober*  
Patent Agents